


RIDGER

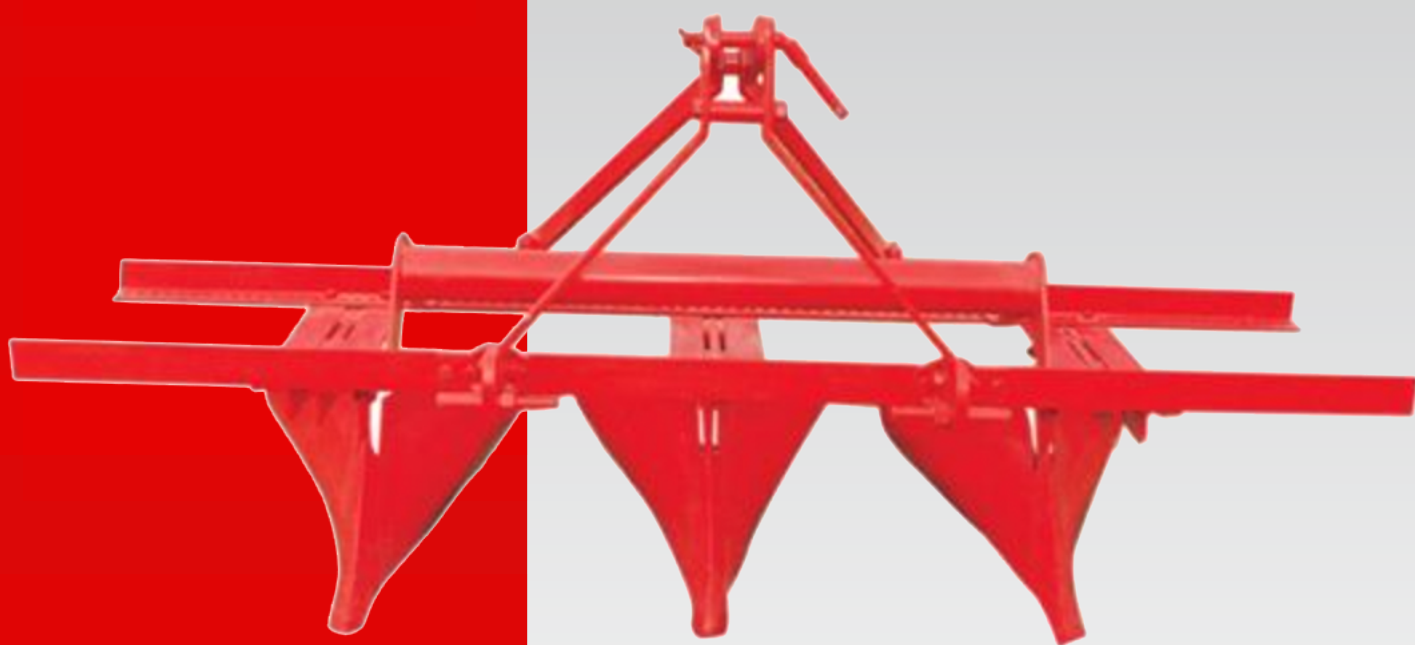

MADFI

DESCRIPTION

FEATURES

PRIMARY AND SECONDARY TILLAGE IMPLEMENT
PERFORMS SHALLOW TILLAGE OPERATION
FOR PREPARATION OF SEEDBED AND EARTHING OF CROPS
Wo Mould Boards – Turning soil to left and right
To split fields into ridges/furrows and earthing up crops
Broader bed
Accurate row width
Disturbs the top surface of the soil
Ideal for row crops

SPECIFICATIONS

Max. Row Spacing	711 m (Decreasing in increments of 25 mm)
Overall width	1,778 mm
Depth	1,050 mm
Clearance (under frame)	550 mm
Weight	145 Kg.
Tractor Compatibility	45-85 HP



8KM Sheikhpura Road,
Opp. Millat Tractors Limited,
Lahore, Pakistan



Tel:+92-42-37925318, 37925218
Fax: +92-42-379299371



madfi786@yahoo.com



www.madfi.com.pk