


ROTARY TILLER

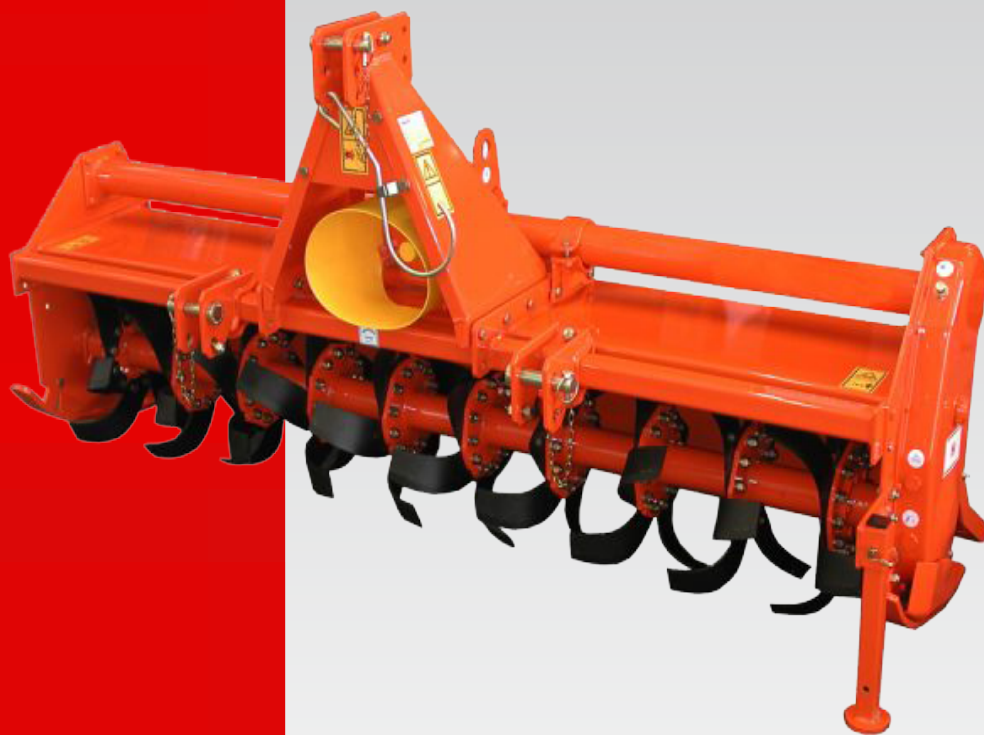

MADFI

DESCRIPTION

FEATURES

CARRIES OUR SHALLOW TILLAGE OPERATIONS
CURVED BLADES SLICE THROUGH THE SOIL
CHOP SURFACE RESIDUE
MIX ALL MATERIAL IN THE DISTURBED LAYER.
PULVERIZE THE SOIL AND BURIES WEEDS AND CROP RESIDUE.

6 Blades on one flang.
8-9in flang distance.
Heat treated blades
Durable against torque and stress.
Smooth, efficient power transmission and superior durability.
Grease fittings on driveline and rotary shaft.

SPECIFICATIONS

Working Width	130 cm	155 cm	Above 155 cm
Tractor HP (PTO)	30-35	40-45	50 hp
Working Depth	22 cm	22 cm	22 cm
No. of Blades	30	36	42, 48, 54 & 60
Blade Type	Speed or Universal	Speed or Universal	Speed or Universal
Side Drive	Gear Train	Gear Train	Gear Train
Rotor Speed at 540 rpm	213	213	213
Safety Clutch	Between U/J Shaft and Gear box Adjustable.		
Mounting	Standard 3 point with cat I pins. Mounted centrally behind the tractor or offset to the right.		



8KM Sheikhpura Road,
Opp. Millat Tractors Limited,
Lahore, Pakistan



Tel:+92-42-37925318, 37925218
Fax: +92-42-379299371



madfi786@yahoo.com



www.madfi.com.pk